

VB-7242 Vertical Baler

Specifications

Bale Size (W x D x H)	72" x 42" x 44"	
Total Chamber Capacity	147 Cubic Feet	
Cycle Time	32 Seconds	
Load Height (B)	53 1/2"	
Feed Height (C)	27 3/4"	
Platen Dimensions (L x W)	70 1/2" x 41 1/2"	
Ram Penetration	54" (18" From Bottom of Baler)	
Cylinder Bore, Rod & Stroke	7" x 4" x 54"	
Operating Pressure		
	Normal	1850 PSI
	Maximum	2250 PSI
Ram Force Rating		
	Normal	24.33 PSI / 71,194 Lbs
	Maximum	29.60 PSI / 86,588 Lbs
Motor (HP)	20 HP	
Pump (GPM)	18.5 GPM-Regen	
Tank Capacity	20 Gallons	
Shipping Weight	6, 710 Lbs	

All Specifications are subject to change without notice.

Available with Chamber Door Hinged Right or Left

Installation Requirements

Electrical Disconnect Requirements

20 HP Motor		
Voltage	Amperage	Fuse
208	100	80
240	100	70
480	60	40

Minimum Clearance Requirements:


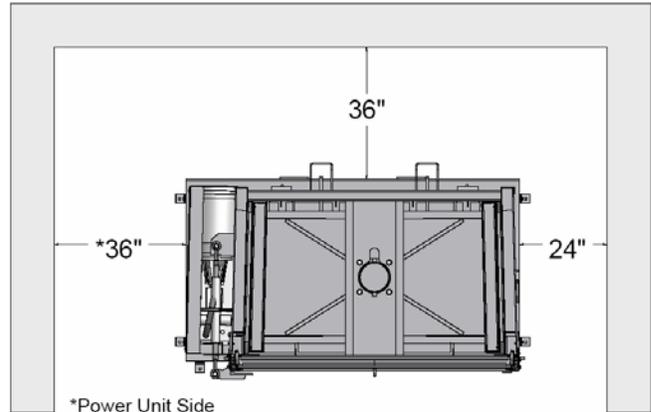


Illustration for reference only



A	B	C	D	E	F	G	H	Capacity
103 1/2"	53 1/2"	27 3/4"	71"	131 1/2"	151 1/2"	91"	53 1/2"	147 Cu.Ft.

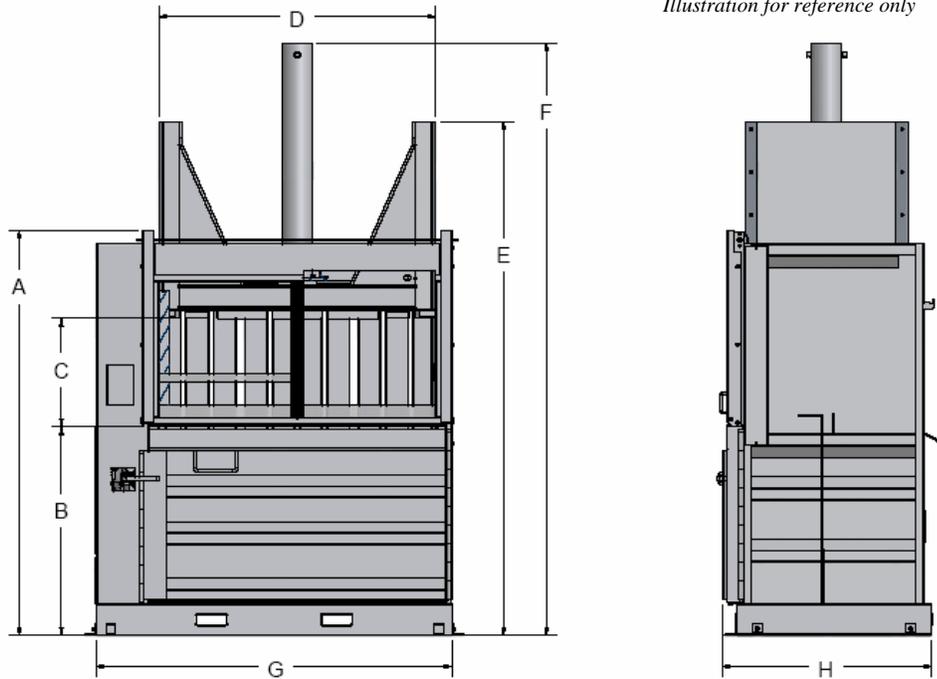

Distributor

385 Sumpter Road • Belleville • MI 48111-2932 • Phone (734) 699-5561 • Fax (734) 699-0360

P.O. Box 68 • Belleville • MI 48112-0068

On the Web at: <http://www.contractwelding.com>

06/06 REV_1