

# Roll-Off Containers Standard Duty

## 10 to 40 -Yard Capacity

Specifications		
Manufacturer's Rated Size	Shipping Weight	
10 Cubic Yards	3, 320 Lbs (approx)	
15 Cubic Yards	4, 480 Lbs (approx)	
20 Cubic Yards	5, 640 Lbs (approx)	
25 Cubic Yards	6, 100 Lbs (approx)	
30 Cubic Yards	6, 560 Lbs (approx)	
40 Cubic Yards	7, 810 Lbs (approx)	
Construction		
	Standard	
Sides	Side Walls	10 Ga.
	Top Rails	4" x 4" x 3/16" Tube
	Side Supports	10 Ga. Formed Channel 24" Centers
	Rear Corner Posts	1/4" Formed Channel
	Floor	Long Rails
Rail End Inserts		1 1/2" Plate
Floor Plate		3/16" Plate
Floor Reinforcement		3"- 4.1 # Structural Channel 16" Centers
Hook Plate		3/4" Plate
Hook		1 1/2" Plate
Rollers		3 1/2" O.D. x 6" Wide
Roller Arms		1" Plate
Wheels		10 3/4" O.D. x 8" Wide
Axles		1 7/8" O.D. with Grease Fittings
Wheel Brackets		3/8" Plate
Front	Wall	10 Ga.
	Reinforcement	3/16" Formed Channel
	Bumper Pad	3/8" x 12" x 36" Formed
Door	Wall	10 Ga.
	Frame	4" x 4" x 3/16" Tube
	Supports	2 - 3/16" Formed Channel

All Specifications are subject to change without notice.

### Standard Features

- Grease Fittings on All Hinges & **Both** Sides of All Axles
- Door Guides
- Single Handled Latch Lever Bar
- Tarp Hold Downs

### Available Options

- Neoprene Door Seals
- Custom Latch Systems
- Top Hinged "Dump Style" Door
- Custom Top Covers
- 1/2" x 2" Rail Wear Strips
- 6" x 2" x 3/8" Rails
- Customization Available

Model	A	B	C	D	E	F	Capacity
RO-10	12' 6 1/2"	11'	56"	44"	96"	85 1/2"	10 Yards
RO-15	17' 6 1/2"	16'	56"	44"	96"	85 1/2"	15 Yards
RO-20	23' 6 1/2"	22'	56"	44"	96"	85 1/2"	20 Yards
RO-25	23' 6 1/2"	22'	66"	54"	96"	85 1/2"	25 Yards
RO-30	23' 6 1/2"	22'	76"	64"	96"	85 1/2"	30 Yards
RO-40	23' 6 1/2"	22'	96"	84"	96"	85 1/2"	40 Yards


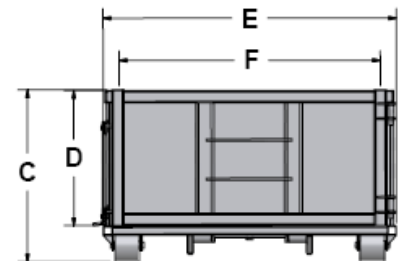


Illustration for reference only

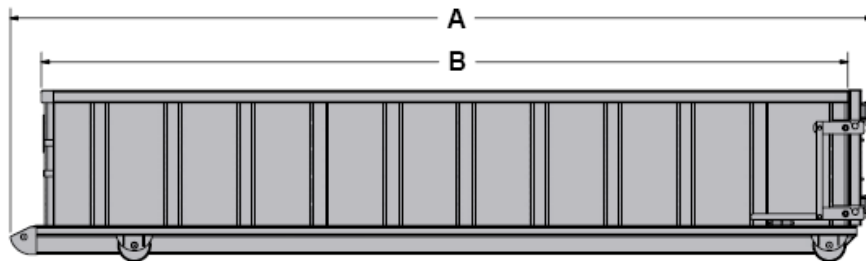

Distributor

385 Sumpter Road • Belleville • MI 48111-2932 • Phone (734) 699-5561 • Fax (734) 699-0360  
 P.O. Box 68 • Belleville • MI 48112-0068  
 On the Web at: <http://www.contractwelding.com>

02/07 REV1